

GT8-MAX

Geotechnical Drill Rig.
Compact and sturdy design
to harness the power of a drilling
rig in a multifunction drill.



SPECIFICATIONS

Max. torque	12,516 ft.-lbs. (4,173.05 kg)
Max. rotation speed	851 rpm
Push and pull capacity	44,000 lbs. (19,958 kg)
Head sliding clearance	16 in. (406 mm)
Front-rear slide mast	10 in. (254 mm)
NWL diamond core drilling capacity	1,970 ft. (600 m)
Performance may vary depending of the PTO configuration	

FEATURES AND BENEFITS

- Best-in-class torque - Max. speed combo
- Best-in-class for depth in NWL core
- Reliable and simple components for affordable maintenance and continued operations under all conditions
- Truck unit at 23,000 lbs. without options

GT8-MAX

GEOTECHNICAL DRILL RIG

Power unit

Diesel engine (standard) Cat C3.6 Tier 4 Stage 5 / or PTO Driven

Hydraulic system

Hydraulic pump (2) (max. L/min - gal/min) (max. psi - bar)	191 L/min (42 US gal/min) @ 2,400 rpm (4,000 psi [310 bar])
Variable volume hydraulic oil tank	1,300 cc
Oil heat exchanger	Air cooling
Filtration	10 micron filter on return line
Leveling jacks (4)	42 in. (1,067 mm) stroke

Rotary head

Final drive	HV 80-4 chain in an oil bath
Hydraulic motor	80 cc
Transmission	Equipped with 2 x 2 speeds transmissions
Rotary head ratio	2.1:1
Lubrication	Pump-pressurized with filter
Speed	0 to 837 rpm

2-Speed transmission

Speed	RPM	Torque
1st	0-29	12,516 ft.-lbs. (16,972 Nm) @ 450 rpm
2nd	0-113	3,217 ft.-lbs. (4,362 Nm) @ 130 rpm
3rd	0-244	1,492 ft.-lbs. (4,905 Nm) @ 116 rpm
4th	0-951	386 ft.-lbs. (520 Nm) @ 34 rpm

Long Mast

Head stroke	132 in. (3.35 m) hydraulically
Head sliding clearance	16 in. (406 mm) Hydraulically
Push and pull speed	0-130 ft./min (0-41 m/min) @ 4,000 psi
Push and pull capacity	44,000 lbs. (19,958 kg) @ 4,000 psi
Possible angle	45 to 90 degrees
Front-rear slide mast	10 in. (406 mm) displacement
36" dump mast	
Left-right slide mast	6 in. (152 mm) displacement

* Wireline hoist with hydraulic cable guide level winde

Cable capacity (3/16 in. / 1/4 in.)	2,130 ft. (650 m)
Empty pull capacity	2,500 lbs. (1,135 kg)
Full pull capacity	650 lbs. (295 kg)

* Main hoist

Capacity	9,000 lbs. (4,082 kg)
Cable diameter	1/2 in. (12.7 mm)
Cable capacity	100 ft. (30 m)



* Auxiliary hoist

Capacity	3,000 lbs. (1,360 kg)
Cable diameter	3/8 in. (9.52 mm)
Cable capacity	100 ft. (30 m)

ALSO AVAILABLE (* OPTIONS)

- Hydraulically operated SPT automatic hammer
140 lbs (64 kg) or 340 lbs (154 kg)
- Auger guide frame with variety of removable guide
- Hydraulic breakout wrench
- Water pump type: Triplex, Progressive cavity and/or peristaltic
- Track carrier with blade option and rod rack option
- Rod rack options
- Wiggle tail
- Water tank options available
- Tool boxes
- Swing out auger rack
- On deck rod storage
- Safety driver hoist
- Automatic chuck

DIMENSIONS

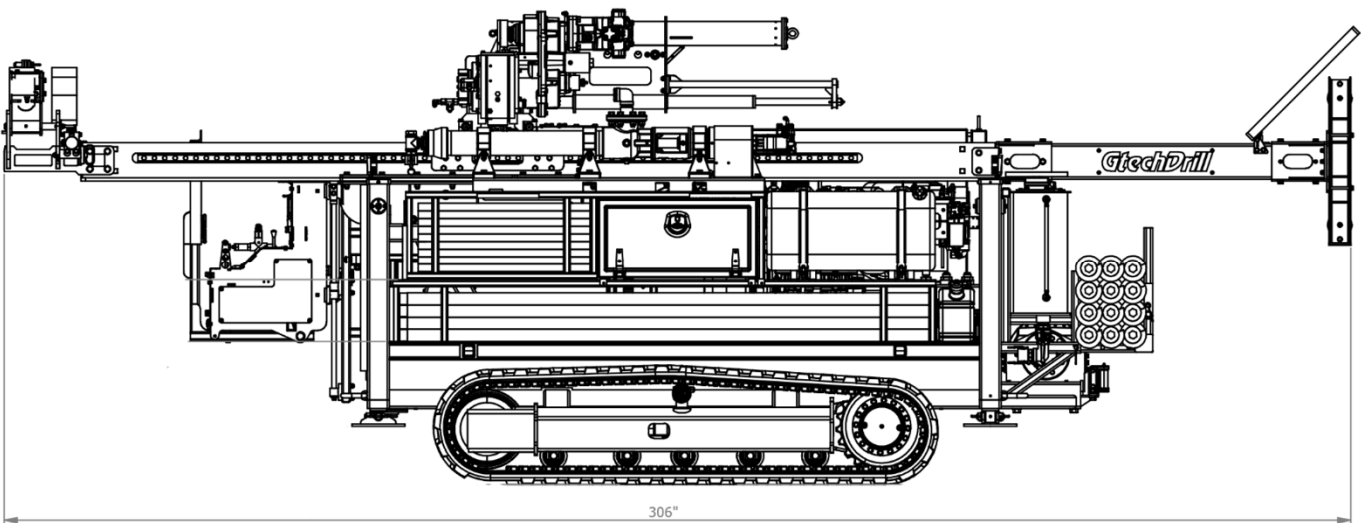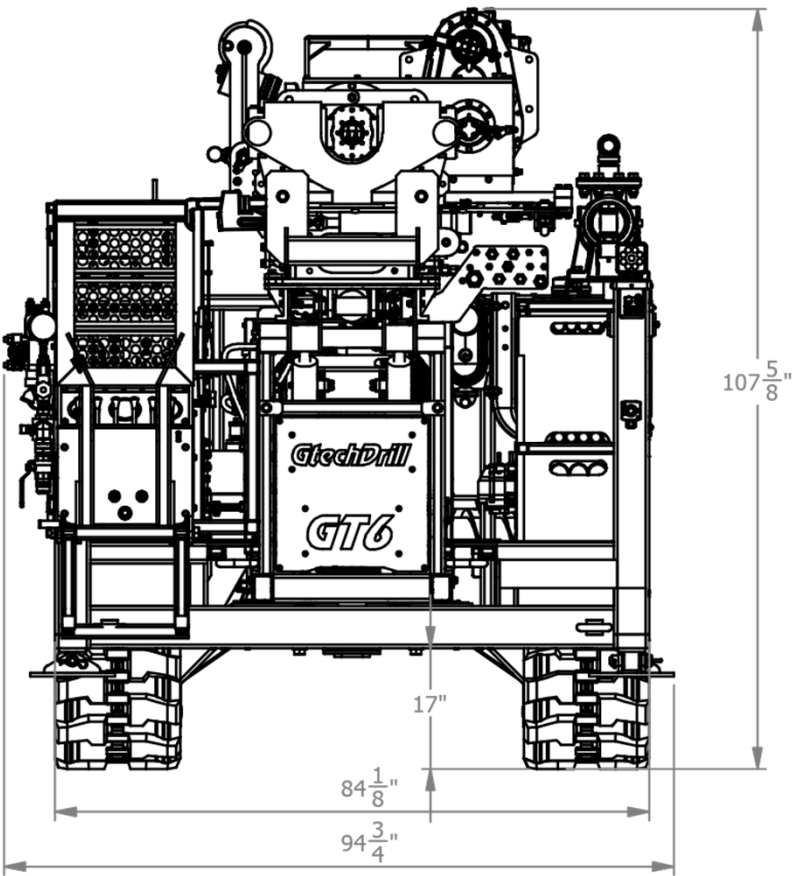

STRONGER AND STRONGER

Distributor:



110, rue Jacques-Bibeau, Rouyn-Noranda (Québec) J9Y 0A3, Canada

1 819 762-9645 info@mbiblobal.com